


SWK6

Micro-perforated acoustic fabric for ceilings, walls, panels and screens.


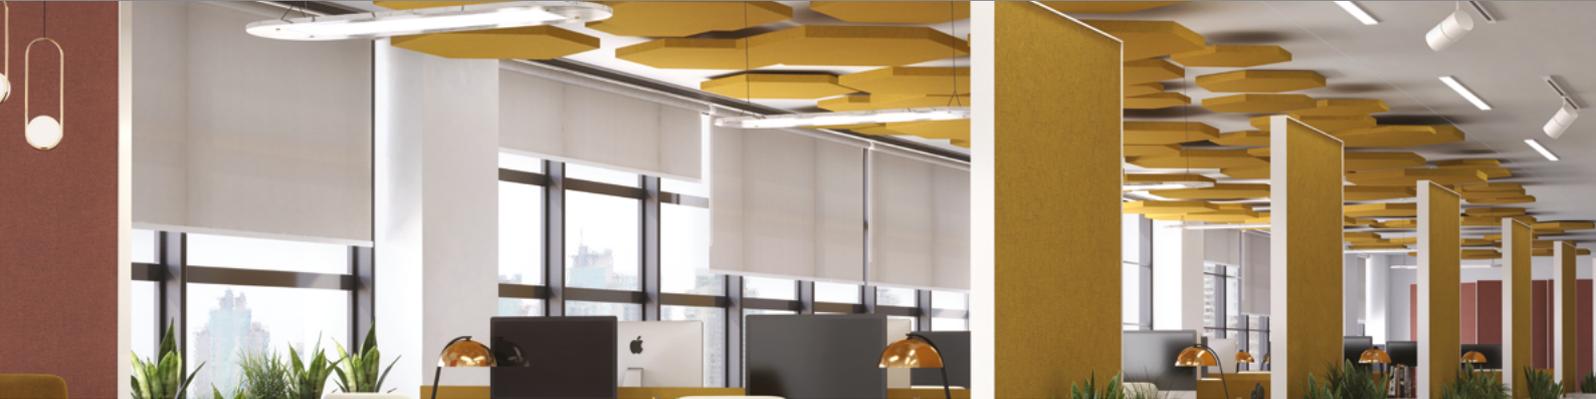


> UP TO 100% ACOUSTIC ABSORPTION

Official acoustic measurements conducted by the CSTB in reverberation room, reports available on request

> #1 Performance: $\alpha_w = 1.00$ | NRC = 1.00 | SAA = 1.11



- Main applications: stretch ceilings and walls, printed surfaces
- Configuration: 100 mm plenum, 100 mm acoustic absorbent, single layer of SWK6

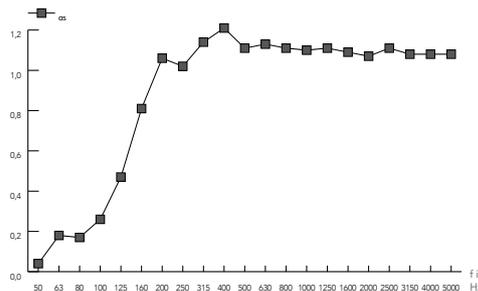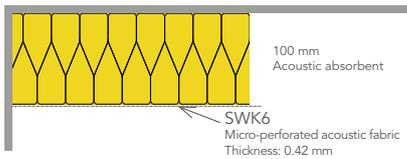

| f in Hz | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 | 315 | 400 | 500 | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 | 3150 | 4000 | 5000 | |
|------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| α_s | 0,04 | 0,18 | 0,17 | 0,26 | 0,47 | 0,81 | 1,06 | 1,02 | 1,14 | 1,21 | 1,11 | 1,13 | 1,11 | 1,10 | 1,11 | 1,09 | 1,07 | 1,11 | 1,08 | 1,08 | 1,08 | 1,08 |

> #2 Performance: $\alpha_w = 1.00$ | NRC = 0.95 | SAA = 0.92



- Main applications: acoustic panels, baffles, printed surfaces
- Configuration: 50 mm plenum, 45 mm acoustic absorbent, double layer of SWK6

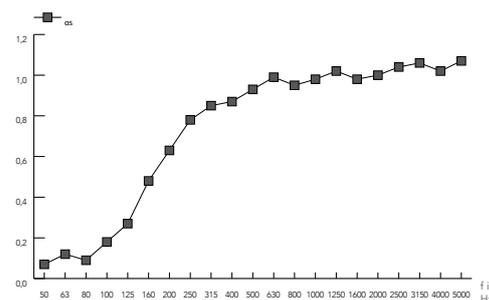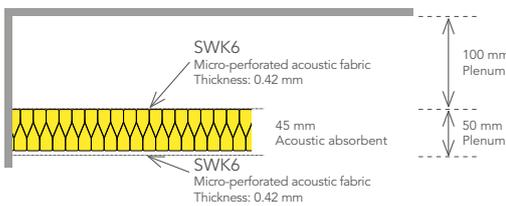

| f in Hz | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 | 315 | 400 | 500 | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 | 3150 | 4000 | 5000 |
|------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| α_s | 0,07 | 0,12 | 0,09 | 0,18 | 0,27 | 0,48 | 0,63 | 0,78 | 0,85 | 0,87 | 0,93 | 0,99 | 0,95 | 0,98 | 1,02 | 0,98 | 1,00 | 1,04 | 1,06 | 1,02 | 1,07 |

> #3 Performance: $\alpha_w = 0.25$ | NRC = 0.20 | SAA = 0.18

- Main applications: ZIP screens, velums, aesthetic sliding panels, sails, stretch ceilings and walls
- Configuration: 100 mm plenum, single layer of SWK6

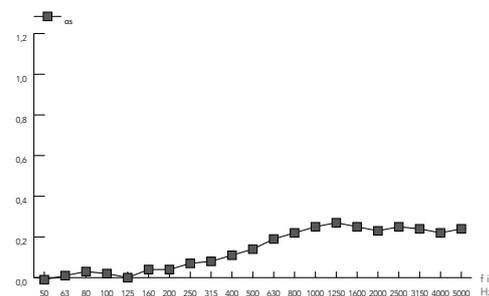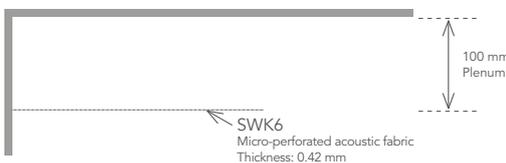

| f in Hz | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 | 315 | 400 | 500 | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 | 3150 | 4000 | 5000 |
|------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| α_s | -0,01 | 0,01 | 0,03 | 0,02 | 0,00 | 0,04 | 0,04 | 0,07 | 0,08 | 0,11 | 0,14 | 0,19 | 0,22 | 0,25 | 0,27 | 0,25 | 0,23 | 0,25 | 0,24 | 0,22 | 0,24 |

SWK6

Micro-perforated acoustic fabric for ceilings, walls, panels and screens.



> ACOUSTIC COMFORT

- SWK6 is an acoustic fabric to use alone or with an absorber for optimal results in most operating conditions
- SWK6 reduces reverberation and is absorbent at all frequencies to provide effective sound correction for a complete range of needs.

> VERSATILE

a fabric that stands the test of time

- Welded or sewn, with excellent aesthetic and acoustic qualities, SWK6 is suitable for indoor and outdoor use.
- Adapted to all tensile fabric architecture requirements, SWK6 easily fits any specific size, shape or dimension.
- Regular and available in some twenty colours, SWK6 comes in two widths, 150cm and 300cm, to ensure prescribers a homogeneous layout.
- SWK6 fabric is fully printable with the designs of your choice.

> RESISTANCE

- SWK6 has a Rachel Trameur construction. Fully resistant to tearing, it is ideal for any high-traffic and public-use space.
- SWK6 can be installed with any type of perforation and penetration (sprinklers, lighting fixtures and suspensions) with zero risk of deformation and is impact resistant.



- 1 Textile ply formed by weaving high-strength polyester yarn
- 2 Binder yarn secures the textile ply but allows the threads to move independently of each other, thereby distributing and absorbing the mechanical energy in the event of tearing.
- 3 A special coating that protects colours from UV rays and inclement weather.

> SUSTAINABLE DEVELOPMENT

SSWK6 is manufactured in France, in compliance with the REACH regulation and is ISO 9001 Quality Management System and ISO 14001 Environmental Management System certified.

SWK6 has a low carbon footprint (1.6 kg CO₂ equivalent) due in particular to its weight of 300 g/m² and controlled material quantity. EPD (Environmental Product Declaration) available on request.

Used with SWK6, the impact of dynamic solar protection on the energy gain and reduced carbon footprint of a building in the European Union is 22% on average (source: ES-SO).

SWK6 reduces the building's environmental footprint throughout its lifetime.

SWK6 is certified A+ and Greenguard Gold to guarantee consistent indoor air quality.

By guaranteeing thermal, visual and acoustic comfort, energy performance and indoor air quality, SWK6 is a major ally in obtaining HQE, BREEAM or LEED certification.

SWK6 supports your recycling policy and gives a new lease of life to your waste through its «RE-SOURCE» program. Partnership charter available on request.

Our BIM object is available for your digital mock-up via the BIM OBJECT platform (www.bimobject.com)